

DocuCentre-V C2265 / C2263



DocuCentre-V C2265 / C2263

Easy to Operate, Easy to Collaborate

FUJI xerox 



Compact size with wide possibilities.

DocuCentre-V C2265 / C2263 has advanced functions compatible with high-end model. With compact design that can be installed anywhere, it can be actively utilized in various business scenes.

It provides easy-to-use operability and visibility in addition to improve image quality. Noise-free environment friendly design enables you to concentrate on your work. Put a dependable partner with great potential in a small body in your office.

Copy
B / W, Colour
C2265 | C2263
25 | **20**
ppm^{*1}

Print
B / W, Colour
C2265 | C2263
25 | **20**
ppm^{*1}

Fax
Super G3 Supported

Scan
B / W, Colour
55
ppm^{*2}

*1: A4 LEF

*2: Fuji Xerox Standard Paper (A4 LEF) 200dpi, to Folder.

DocuCentre-V C2265 / C2263



Compact design enhanced flexibility in adapting to various installation space



Optional Functions



① Finisher-A1
[Staple]



② Finisher-B1
[Staple] [2-hole punch]



③ Booklet Maker Unit for
Finisher B1
[Staple] [2-hole punch+saddle staple]



④ 1 Tray Module with Cabinet



⑤ 3 Tray module

Convenient inner output tray, bypass tray that can be used to print on envelope



The inner output tray and optional side tray allow you to switch output trays for copy, fax, and print jobs.



The bypass tray is convenient for printing on envelopes used when sending delivery notes and invoices.

More efficient use of multifunction device



High resolution with the use of LED print head

High image quality output of small characters and thin lines at 1200 x 2400 dpi. Beautiful reproduction of business color documents.

Clear printout

Provides 1200 x 2400 dpi output resolution with the adoption of high-quality, energy saving LED print head. The Fuji Xerox's Image Registration Control Technology "IReCT" used in high-end models provides ultra-high-precision print image with minimum color shifts.

Faster scan

The Duplex Automatic Document Feeder capable of stacking up to 110 sheets can quickly read both colour and monochrome documents at 55 sheets per minute. It can turn large amount of paper documents into electronic form without stress.




Scan data can be converted to DocuWorks document or PDF when sending as e-mail or storing in PC. Also available are functions such as OCR* useful for search, compression to reduce communication load, and password to provide security. Scanned data can be saved directly to USB memory.

* Optional.

Two easy-to-use scan applications are available

Scan Auto (personal use)

Automatically send scanned file to yourself. No need to worry about setting because scan settings are automated.




By task Scan Delivery (group use)*

Press a button specific to the type of document and send the scanned file to the specified storage destination. The administrator configures in advance so there is no need to configure individually.

* Optional.

Easy operation from “Simple” windows


“Simple Copy” and “Simple Fax” windows are available to easy operation. This operation by showing only the basic settings. Easier to read with 5 mm font.

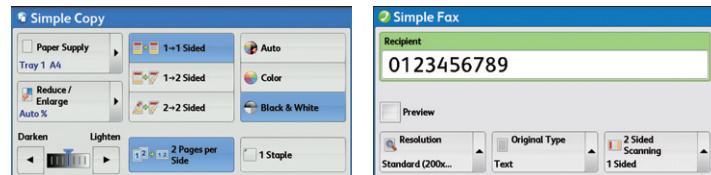

Waste-free fax

[Reception]

Received fax documents are stored in a folder and you can view their thumbnails to print only the necessary documents. This reduces unnecessary print out. Once a fax is stored in a folder, you can send it by mail or transfer it to a shared folder in addition to printing. You can even check the content of your fax on your smartphone while on the go.

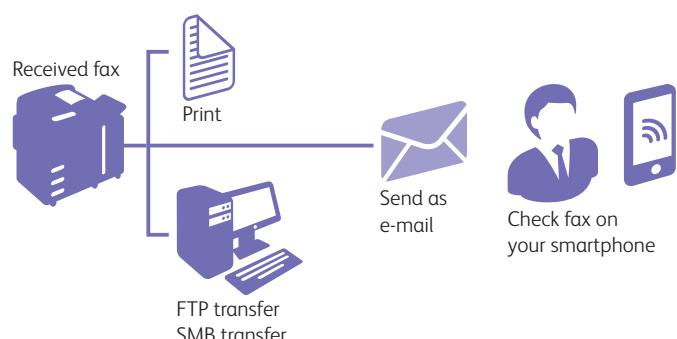

[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can also be saved as PDF and sent as e-mail attachments.

[Reject]

Allows administrators to block incoming faxes from certain numbers and anonymous numbers.

Supports secure and waste-free output

Print jobs are stored in the storage device of the multifunction device and output only after authenticating. This prevents uncollected print output and print error. You can also set the number of copies or change the print settings such as from 2 to 1 sided or color to monochrome mode during output. Thus reducing error, waste, and TCO.

* Requires use of authenticate mode.

Efficiently utilize multiple multifunction devices


Printable from Any Machine on Demand

After a job has been sent to the device, users can choose the "Server-less On-demand" feature to print it from any machine on the network on demand, simply by logging on to the machine. Even if the selected device is in use, users can choose their job from another machine and print it. No dedicated server is required for this feature. It is also possible to use up to five devices in this way by grouping them – for example, by floor or workgroup.

* Optional.

Authentication using IC card

The authentication function can be used to restrict unauthorized users from accessing the multifunction device. You can also check each user's usage from the job log. Authentication using an IC card is also possible by adding an IC card reader to the multifunction device.

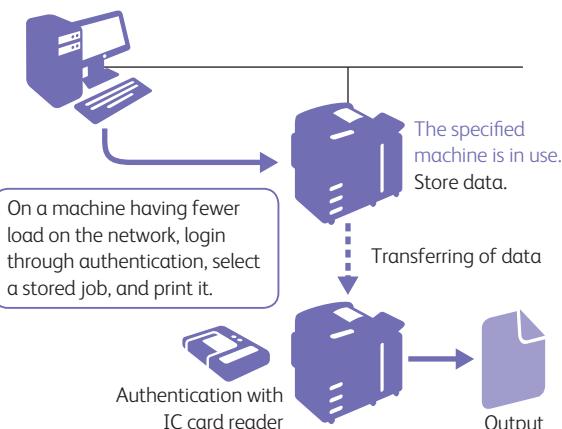

Easy printing wherever you are

Print Utility for iOS / Android

This free Fuji Xerox application lets you output web pages, pictures, DocuWorks and PDF documents^{*1}, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing^{*2} is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later. More applications allow output using Print Utility for Android.

* Print Utility can be downloaded for free from the App Store (iOS) or Google Play™(Android).

*1: Outputting DocuWorks and PDF documents requires DocuWorks Viewer Light for iPhone/iPad or DocuWorks Viewer Light for Android.

*2: Optional.

Google Cloud Print

By registering the multi-function device with Google Cloud Print, you can output documents via the cloud from Android™ devices, Chromebook™ and computers.

Giving permission to office visitors provides them with a printing environment without connecting to your Intranet.

* Google Could Print is a web printing service from Google.



Wi-Fi Direct®

Wi-Fi Direct® can be used with a wireless LAN adaptor. You can connect personal mobile devices directly to the multi-function device then print. Using a wireless LAN access point allows you to separate connections from business mobile devices and computers on an Intranet.

* Optional.

AirPrint

Supports AirPrint, iOS and OS X standard print functions. You can output e-mails and documents created with Apple applications, including Safari, Map, Numbers, Pages and Keynote, and Microsoft applications such as Word, Excel® and PowerPoint®.



Mopria™ Print

You can output on a Mopria-certified device from Mopria Print Service* installed on mobile devices without installing different printing applications of models or manufacturers.



* Mopria Print Service can be downloaded for free from Google Play™ (Android™ 4.4 or later)

Environmentally responsible

Excellent noise reduction performance through airflow design

Natural convection is used in addition to reducing the number of cooling fans and the fan is stopped completely during standby. This enables energy-saving and ultra-low noise during standby (3.3B¹). Also, the 6.4B² noise level during operation is hardly noticeable enabling installation on top or side of a desk with no problem.

* For DocuCentre-V C2263.

*1: A-weighted sound power level (LwAd), A-weighted emission sound pressure level (LpAm) is 17dB. Measurement is ISO7779.


*2: A-weighted sound power level (LwAd), emission sound pressure level (LpAm) is 47dB. Measurement is ISO7779.

Using environmentally safe new materials

Facing the challenges of modern society such as global warming, petroleum resource depletion and food problem, Fuji Xerox is engaged in the research and development of environment friendly cellulosic bio-based plastics. The newly developed "woody non-edible biomass plastics" has more strength and flame resistance compared with the conventional petroleum-based plastics and enables reduction of CO₂ emissions. It is adopted also for some parts of new products.

"Smart Energy Management" for Specific Power Use

Power consumption and CO₂ emissions are reduced by supplying power only to the portion to be used depending on the used functions. For example, during scanning or fax transmission, no power is supplied to unnecessary output device.




Quickly reverting operation panel

The control panel becomes available about 3 seconds after pressing the power save button. Promoting environmental awareness without special consideration.

Energy-saving design consuming less than 1.0 W power during sleep mode

The newly adopted low-power controller and fax boards significantly improve power consumption during sleep. Energy efficiency is increased.

Sleep mode power consumption comparison (unit: W)

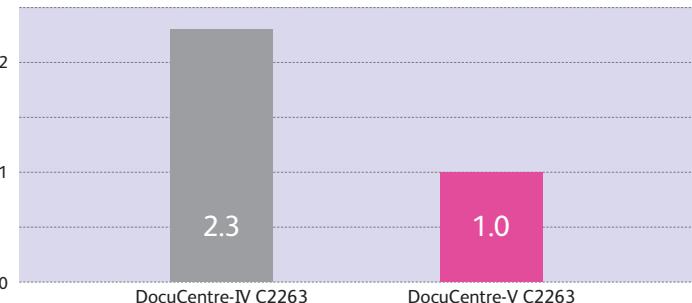


Cloud service connecting directly to the multifunction device

Directly accessible from the multifunction device linking with the Fuji Xerox's cloud service "Working Folder." You can transfer scanned documents and received fax documents, and also output saved document. In addition to editing documents on the cloud in DocuWorks Desk, you can also view and edit them from your smartphone.

* Agreement to use the Working Folder service is necessary in order to use this function.


Quickly check received fax on the go

Automatically upload received fax to the Working Folder.

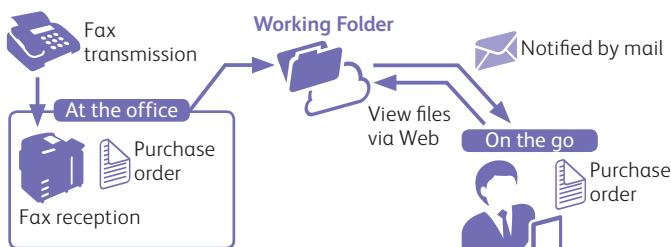

Efficiently perform business activities on the road through mobile coordination

Documents in the Working Folder can be accessed even from a smartphone or tablet.

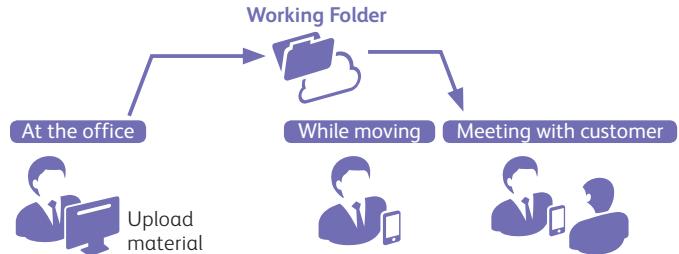

Specifications of DocuCentre-V C2265 / C2263

Basic Specifications/Copy Function

Item	DocuCentre-V C2265	DocuCentre-V C2263															
Type	Console																
Memory capacity	4 GB (Max: 4 GB)																
Hard disk capacity*1	250 GB or larger (Usable space: 128 GB)																
Colour Capability	Full Colour																
Scan Resolution	600 x 600 dpi																
Printing Resolution	1200 x 2400 dpi																
Warm-up Time	30 seconds or less, 22 seconds or less if the main power is on (At room temperature 23°C)																
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book																
Paper Size	<table border="1"> <tr> <td>Max</td><td>A3, 11 x 17"</td> </tr> <tr> <td>Min</td><td>A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray]</td> </tr> <tr> <td>Image loss width</td><td>Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm</td> </tr> </table>	Max	A3, 11 x 17"	Min	A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray]	Image loss width	Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm										
Max	A3, 11 x 17"																
Min	A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray]																
Image loss width	Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm																
Paper Weight*2	Paper Tray 60 to 256 gsm Bypass Tray 60 to 216 gsm																
First Copy Output Time	B/W*3 5.9 sec. Colour*4 8.1 sec.																
Continuous Copy Speed*5	<table border="1"> <tr> <td>A4 LEF / B5 LEF</td><td>B/W: 25 ppm, Colour: 25 ppm</td><td>B/W: 20 ppm, Colour: 20 ppm</td> </tr> <tr> <td>A4</td><td>B/W: 19 ppm, Colour: 19 ppm</td><td>B/W: 16 ppm, Colour: 16 ppm</td> </tr> <tr> <td>B5</td><td>B/W: 14 ppm, Colour: 14 ppm</td><td>B/W: 11 ppm, Colour: 11 ppm</td> </tr> <tr> <td>B4</td><td>B/W: 16 ppm, Colour: 16 ppm</td><td>B/W: 13 ppm, Colour: 13 ppm</td> </tr> <tr> <td>A3</td><td>B/W: 14 ppm, Colour: 14 ppm</td><td>B/W: 11 ppm, Colour: 11 ppm</td> </tr> </table>	A4 LEF / B5 LEF	B/W: 25 ppm, Colour: 25 ppm	B/W: 20 ppm, Colour: 20 ppm	A4	B/W: 19 ppm, Colour: 19 ppm	B/W: 16 ppm, Colour: 16 ppm	B5	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm	B4	B/W: 16 ppm, Colour: 16 ppm	B/W: 13 ppm, Colour: 13 ppm	A3	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm	
A4 LEF / B5 LEF	B/W: 25 ppm, Colour: 25 ppm	B/W: 20 ppm, Colour: 20 ppm															
A4	B/W: 19 ppm, Colour: 19 ppm	B/W: 16 ppm, Colour: 16 ppm															
B5	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm															
B4	B/W: 16 ppm, Colour: 16 ppm	B/W: 13 ppm, Colour: 13 ppm															
A3	B/W: 14 ppm, Colour: 14 ppm	B/W: 11 ppm, Colour: 11 ppm															
Paper Tray Capacity*6	<table border="1"> <tr> <td>Standard</td><td>2 Tray Module with Cabinet: 500 sheets x 2 Tray + Bypass Tray 96 sheets 4 Tray Module: 500 sheets x 4 Tray+ Bypass Tray 96 sheets</td> </tr> <tr> <td>Max</td><td>2096 sheets 4 Tray Module + Bypass Tray 96 sheets</td> </tr> </table>	Standard	2 Tray Module with Cabinet: 500 sheets x 2 Tray + Bypass Tray 96 sheets 4 Tray Module: 500 sheets x 4 Tray+ Bypass Tray 96 sheets	Max	2096 sheets 4 Tray Module + Bypass Tray 96 sheets												
Standard	2 Tray Module with Cabinet: 500 sheets x 2 Tray + Bypass Tray 96 sheets 4 Tray Module: 500 sheets x 4 Tray+ Bypass Tray 96 sheets																
Max	2096 sheets 4 Tray Module + Bypass Tray 96 sheets																
Output Tray Capacity*7	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)																
Power Supply	AC220-240 V +/- 10 %, 8 A, 50/60 Hz common																
Maximum Power Consumption	1.76 kW or less (AC220 V +/- 10%), 1.92 kW or less (AC240 V +/- 10%) Sleep Mode: 1.0 W or less (AC220 V +/- 10%) Ready Mode: 78 W or less (AC220 V +/- 10%)																
Dimensions	W 616 x D 659 x H 1119 mm (2 Tray Module with cabinet.) W 616 x D 659 x H 1119 mm (4 Tray Module.)																
Weight*8	92 kg (2 Tray Module with cabinet.) 95 kg (4 Tray Module.)																

*1: The Storage Hard disk capacity is not totally available for customers. *2: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.

*3: A4 LEF / Monochrome priority mode. *4: A4 LEF / Colour priority mode. *5: The speed may be reduced due to the image quality adjustment. *6: 80 gsm paper. *7: 64 gsm paper. *8: Excluding Toner Cartridge.

Print Function

Item	Description						
Type	Built-in type						
Continuous Print Speed*1	Same as the Basic Specifications / Copy Function						
Printing Resolution	1200 x 2400 dpi						
Page Description Language	<table border="1"> <tr> <td>Standard</td><td>PCL5 / PCL6</td> </tr> <tr> <td>Optional</td><td>Adobe® PostScript® 3™</td> </tr> </table>	Standard	PCL5 / PCL6	Optional	Adobe® PostScript® 3™		
Standard	PCL5 / PCL6						
Optional	Adobe® PostScript® 3™						
Supported Operating System	<table border="1"> <tr> <td>Standard (PCL Driver)</td><td>Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)</td> </tr> <tr> <td>Standard (Mac OS X Driver)</td><td>macOS 10.14/10.13/10.12, OS X 10.11/10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5</td> </tr> <tr> <td>Optional (Adobe® PostScript® 3™ Driver)</td><td>Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5</td> </tr> </table>	Standard (PCL Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)	Standard (Mac OS X Driver)	macOS 10.14/10.13/10.12, OS X 10.11/10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5	Optional (Adobe® PostScript® 3™ Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
Standard (PCL Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)						
Standard (Mac OS X Driver)	macOS 10.14/10.13/10.12, OS X 10.11/10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5						
Optional (Adobe® PostScript® 3™ Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit) Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit) Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit) Windows Vista® (64bit), Windows Server® 2012 R2 (64bit) Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit) Windows Server® 2008 (32bit), Windows Server® 2008 (64bit) Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5						
Interface	Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0						

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Side Tray (Optional)

Item	Description
Paper Capacity*1	100 sheets
Dimensions	W 353 x D 429 x H 198 mm

*1: 64 gsm paper.

Scan Function

Item	Description
Type	Colour Scanner
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed*1	Duplex Automatic Document Feeder B/W: 55 ppm, Colour: 55 ppm [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.]
Interface	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T

*1: The scanning speed varies depending on the documents.

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports*2 (G3-3 ports)

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster,JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No.of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

Item	DocuCentre-V C2265	DocuCentre-V C2263
Original Size	Max: A3, 11 x 17"	Min: A5 *1
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)	
Capacity*2	110 sheets	
Feeding Speed	B/W: 25 ppm (A4 LEF Simplex)	B/W: 20 ppm Colour: 25 ppm

*1: The minimum custom size is 125 x 85 mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

Item	Description						
Type	Sort (Offset available) / Stack (Offset available)						
Paper Size	Max: A3, 11 x 17" Min: Postcard (100 x 148 mm)						
Paper Weight	60 to 220 gsm						
Paper Capacity*1	[Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking*2 : 250 sheets [With Stapling] 30 sets						
Staple	<table border="1"> <tr> <td>Capacity</td><td>A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less)</td> </tr> <tr> <td>Paper Size</td><td>Max: A3, 11 x 17" Min: B5 LEF</td> </tr> <tr> <td>Position</td><td>Single stapling</td> </tr> </table>	Capacity	A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less)	Paper Size	Max: A3, 11 x 17" Min: B5 LEF	Position	Single stapling
Capacity	A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less)						
Paper Size	Max: A3, 11 x 17" Min: B5 LEF						
Position	Single stapling						
Dimensions	W 559 x D 448 x H 246 mm						
Weight	12 kg						

*1: 64 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

Item	Description						
Type	Sort (Offset available) / Stack (Offset available)						
Paper Size*1	Max: A3, 11 x 17" Min: B5 LEF						
Paper Weight	60 to 220 gsm						
Paper Capacity*2	[Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking*3 : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets*4 , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing*5] 50 sets or 600 sheets [With Scoring*5] 500 sheets						
Staple	<table border="1"> <tr> <td>Capacity</td><td>50 sheets (90 gsm or less)</td> </tr> <tr> <td>Paper Size</td><td>Max: A3, 11 x 17" Min: B5 LEF</td> </tr> <tr> <td>Position</td><td>Single stapling or Dual stapling</td> </tr> </table>	Capacity	50 sheets (90 gsm or less)	Paper Size	Max: A3, 11 x 17" Min: B5 LEF	Position	Single stapling or Dual stapling
Capacity	50 sheets (90 gsm or less)						
Paper Size	Max: A3, 11 x 17" Min: B5 LEF						
Position	Single stapling or Dual stapling						
Punch*6	<table border="1"> <tr> <td>Number of Holes</td><td>2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)</td> </tr> <tr> <td>Paper Size</td><td>A3, 11 x 17", B4, A4*, A4 LEF, Letter*7 , Letter LEF, B5 LEF</td> </tr> <tr> <td>Paper Weight</td><td>60 to 200 gsm</td> </tr> </table>	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)	Paper Size	A3, 11 x 17", B4, A4*, A4 LEF, Letter*7 , Letter LEF, B5 LEF	Paper Weight	60 to 200 gsm
Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)						
Paper Size	A3, 11 x 17", B4, A4*, A4 LEF, Letter*7 , Letter LEF, B5 LEF						
Paper Weight	60 to 200 gsm						
Booklet Finishing*5	<table border="1"> <tr> <td>Capacity</td><td>Saddle Staple: 15 sheets, Scoring: 5 sheets</td> </tr> <tr> <td>Paper Size</td><td>Max: A3, 11 x 17" Min: A4, Letter</td> </tr> <tr> <td>Paper Weight</td><td>Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm</td> </tr> </table>	Capacity	Saddle Staple: 15 sheets, Scoring: 5 sheets	Paper Size	Max: A3, 11 x 17" Min: A4, Letter	Paper Weight	Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm
Capacity	Saddle Staple: 15 sheets, Scoring: 5 sheets						
Paper Size	Max: A3, 11 x 17" Min: A4, Letter						
Paper Weight	Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm						
Dimensions	W 657 x D 552 x H 1011 mm, With Booklet Finisher: W 657 x D 597 x H 1081 mm						
Weight	28 kg, With Booklet Finisher: 37 kg						

Note: Finisher-B1 is available only when optional 1Tray Module with Cabinet or 3 Tray Module is attached to Main Unit. *1: Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray. *2:64 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: 75 sets or 750 sheets with dual stapling. *5: The Booklet Finishing function requires the optional Finisher-B1 Booklet unit. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. *6: The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications). *7: 3-hole punch is not applicable.

Notes

1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law:
Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specification, please call or visit us at

Kim Fook Equipment Sdn Bhd

Our Office Address :
123, Jalan Perisai,
Taman Sri Tebrau,
80050, Johor Bahru, Johor.

TEL : +607 334 7173
+607 331 5202
FAX : +607 332 9688


Email : andrewchin@kimfook.com.my (Sales / Technical)
nickchang@kimfook.com.my (Sales Department)
technicalsupport@kimfook.com.my (Technical Support)



Ready



Adobe® PostScript® 3™

**For Your Safety**

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

FUJI XEROX 

<https://kimfook.com.my/>